




Frame	Nylon, anti-slip nosepiece
Temple	Polycarbonate/ NON-P PVC
Lens	Polycarbonate, thickness: 2,3 mm
Weight	25 g

Reference	Frame Colour	Lens Colour	Features	Frame Marking	Lens Marking	Lens Norms
 62117	Slate black	Clear	Hard coated	F-CAT.0	2-1,2 1 FK	EN 12312 EN 170
 62127	Slate black	I/O Mirror	UV400	F-CAT.1	5-1,7 1F	EN 12312 EN 172
 62135	Matte Silver/ Fire Red	Fire Mirror	Low energy impact	F-CAT.3	5-3,1 1F	EN 12312 EN 172
 62136	Glossy Metal Grey/ Black	Smoke	Hard coated	F-CAT.3	5-3,1 1FK	EN 12312 EN 172
 62139	Glossy Black/ Black	PCPL Smoke	Low energy impact	F-CAT.3	5-3,1 1F	EN 12312 EN 172
 62148	Matte Black/ Black	Dark Smoke	Hard coated	F-CAT.4	5-4,1 1FK	EN 12312 EN 172

Packaging & Storing

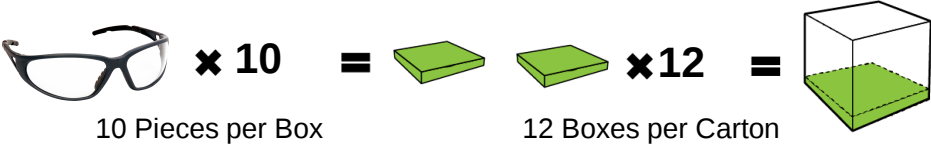

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

120 Pieces in 1 Carton

Product Standards



This article is in conformity with the model of individual safety equipment which correspond to

The CE Type-examination certificate n° 0776
Delivered by INSPEC (notified body n° 0194)



This model is in conformity with the standard EN 166:2001

General Norms & Explanation

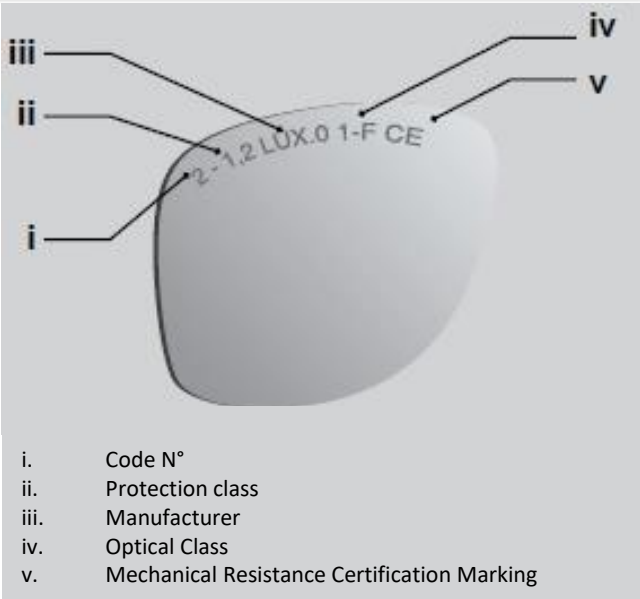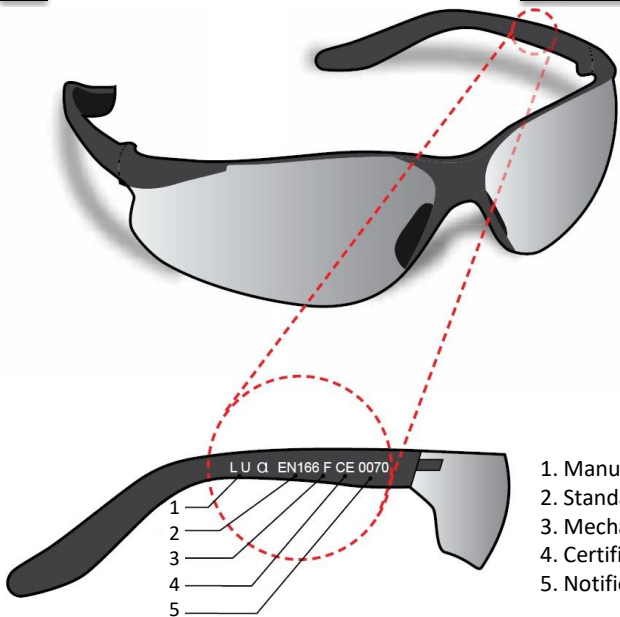

EN 166	Specification (optical quality, resistance to usual and mechanical risks and to impacts)	Temperature between - 5° (± 2 °) & 55° (± 2 °)	T
EN 169	Welding Filters	Hard coated lens	K
EN 170	Ultraviolet filters	Anti-fog coated lens	N
EN 172	Sunglare filters for industrial use	Protection against liquids	3
EN 175	Welding equipments	Enhanced solidity	S
EN 379	Welding filters with variable shade or dual shade	Protection against big dusts	4
EN 1731	Mesh faceshield		
EN 12312-1	Sunglasses and related eyewear : Sunglasses for general use		